



Heat-Activated Backing Films

Stoplight™



Stoplight family of heat-activated backing films are specifically designed for one of the most demanding applications, pop-up display applications. The multi-layers construction includes a hidden layer of aluminum to provide 100 percent opacity from light bleed through. Their white face prevents the color cast that can result when using black backing films.

Stoplight™ 115


This heat-activated film has been designed especially for roll-up displays and banner stands. It is specifically designed with an essential light-blocking layer. When used in conjunction with Jet Guard Crystal Matte it provides the ultimate, high quality finishing solution.

Stoplight™ 220

An ideal backing film for all pop-up display systems, Stoplight 220 is a high quality backing film providing a rigid, yet flexible opaque backing solution. Constructed with the SEAL patented aluminium layer, it ensures no light can get through to distort the final image. The film has excellent lay flat memory and panels, once created, are easily rolled for storage. This heat-activated film is ideal for use on end and curved panels where flexibility is key. Excellent results are achieved when it is used with Jet Guard Deep Crystal.

Stoplight™ 320

This heat-activated rigid backing film is a key component for all pop-up display systems. It provides the extra rigidity needed, making it the ideal solution for finishing the main front panels. Like Stoplight 220, Stoplight 320 is also constructed with the SEAL patented aluminium layer to ensure that no light can get through to distort the final image. The film has excellent lay flat memory and once panels are created they are easily rolled for storage. When used with Jet Guard Deep Crystal this film provides a high quality finish.

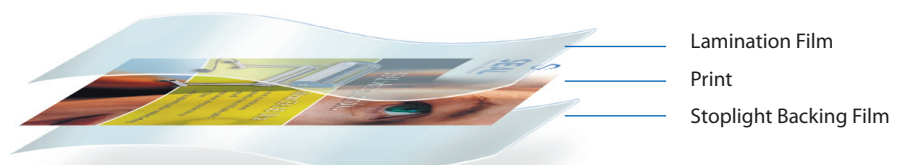

Heat-Activated Backing Films

Stoplight™

Technical Specifications

	Film Type	Adhesive Type	Thickness	Film/Adhesive Ratio	Activation Temperature	100% Opacity
Stoplight 115	Polyester / Aluminum	Extruded Copolymer	4.5 mil	3.0 / 1.5	200-215 °F (94-102°C)	YES
Stoplight 220	Polyester / Aluminum	Extruded Copolymer	9.0 mil	7.0 / 2.0	200-215 °F (94-102°C)	YES
Stoplight 320	Polyester / Aluminum	Extruded Copolymer	12.5 mil	11.0 / 1.0	200-230 °F (94-110°C)	YES

Roll Sizes & Item Numbers

	Item Number	Roll Size
Stoplight 115	62026	38" x 200' (965mm x 61m)
	62024	38' x 25' (965mm x 7.6 m)
Stoplight 220	60660	38" x 200' (965mm x 61m)
	60669	38' x 25' (965mm x 7.6 m)
Stoplight 320	63021	38" x 200' (965mm x 61m)
	63020	38' x 25' (965mm x 7.6 m)

Neschen Americas recommends HP Designjet Printing Systems

Neschen Americas
7091 Troy Hill Drive
Elkridge, MD 21075
U.S.A.
Tel: 800-257-7325
Local: 410-540-8900
Fax: 800-966-4554

Neschen Americas Canada
1601 Matheson Blvd E., Unit 4
Mississauga, Ontario
Canada L4W 1H9

SEAL® Brand is a registered trademark of Neschen Americas

Contact your local distributor:



www.sealbrands.com